


## Visible fastening.

### FTA-CD – Drill bit with countersink and adjustable depth stop

Item	Art. No.	Description	Sales unit [pcs]
FTA-CDW 4 mm	539889	FTA-CD 4 mm Wood drill bit with Ø 4 mm	1
FTA-CDM 4 mm	539890	FTA-CD 4 mm Metal drill bit with Ø 4 mm	1

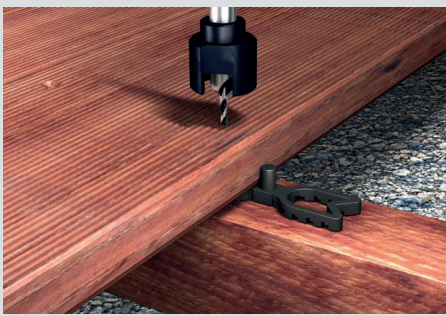

The adjustable depth stop prevents countersinking too far. The stop can be perfectly adjusted for the respective screw head.

#### ADVANTAGES AT A GLANCE


- Pre-drilling and countersinking in one step.
- Uniform depth when countersinking the screw.
- Appealing and uniform installation pattern of the terrace.



*Protects the board from damaging during the pre-drilling.*

### Spacer FTA-V – The universal solution for the visible fixation


Item	Art. No.	Description	Sales unit [pcs]
FTA-V 7 mm	539874	Dimensions 88 x 25 x 6 mm	50

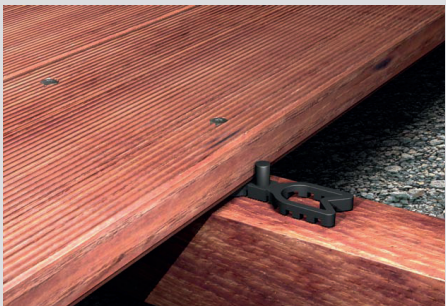

With the fischer spacer FTA-V, decking boards of any size or wood type can be installed easily, quickly and with precision. It creates a uniform installation pattern for the boards without additional tools.

#### ADVANTAGES AT A GLANCE

- Easy and precise board installation without alignment of each board.
- Uniform installation pattern with 7 mm board distance. Recommended for a wood moisture up to 18%.

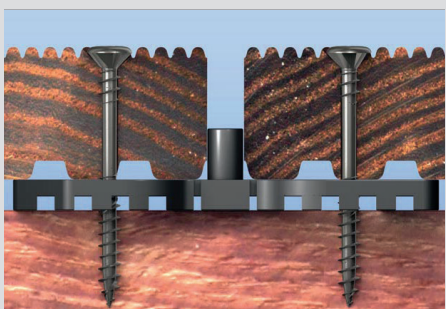

Furthermore, it guarantees spaces between the boards and support rails required for good ventilation. This ensures that any waterlogging that may have occurred can dry out. About 15 – 20 pieces are needed per m<sup>2</sup>, depending on board width.



*Wood protection built right in, because of ventilation under the boards.*